

Balanced 2-way Control Valves type M1FB

Cast iron, PN 16, DN 25 – 80 mm

2.3.03-I

GB-1

Characteristics

- Pressure balanced
- Single seated, tight closing
- Quadratic valve characteristic
- Regulating capability $\frac{k_{vs}}{k_{vr}} > 25$


Applications

The pressure balanced control valves type M1FB are designed for regulating low and medium pressure hot water, steam and lubricating liquids, where the system pressure and the valve size makes it necessary to choose a balanced valve in order to be able to use a single seated valve, which means less leakage.

The valves are installed combined with one of our temperature regulators in control systems for heating of domestic premises, district heating, industrial processes or marine installations.

Dimensioning

For sizing of control valves and selection of actuators, please see "Quick Choice" leaflet no. 9.0.00.

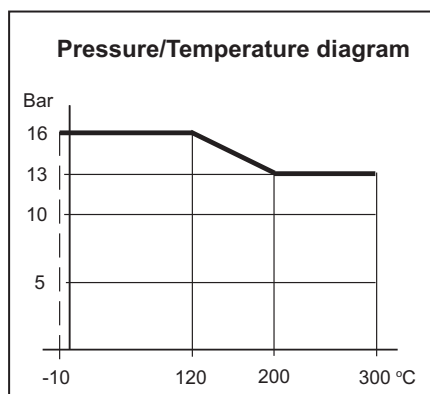

Design

The valve components - spindle, seat, cone and bellows - are made of stainless steel.

The bellows for balancing the pressure is fitted on the valve spindle and it reduces the power necessary for closing the valve, as the upstream pressure of the medium through the hollow valve spindle acts outside and the pressure after the valve acts inside the bellows system.

The valve body is made of cast iron EN-GJL-250 with connection flanges drilled according to EN 1092-2.

The connection thread for the actuator is ISO 228 - G1B.

The valves are single-seated and, by design, tight closing. The leakage is less than 0.05% of full flow (see VDI/VDE 2174).

Function

Without an actuator being connected, the valve is held in open position by means of a spring and the bellow system. With pressure on the spindle the valve will close.

In connection with our thermostats or electronic actuators, the valves will close at rising temperatures. For cooling circuits a reverse acting valve can be used.

The quadratic characteristic will not cease until the flow has dropped below 4% of the full flow.

Quality assurance

All valves are manufactured under an ISO 9001 certification and are pressure and leakage tested before shipment.



Technical data

Materials:

- Valve body Cast iron

EN-GJL-250

- Components

Stainless steel

- Bolts, nuts

24 CrMo 4/A4

Nominal pressure

PN 16

Seating

Single seated

Valve characteristic

Quadratic

Regulating capability $\frac{k_{vs}}{k_{vr}} > 25$

Function

Closing with pressure on spindle

Leakage

$\leq 0.05\%$ of k_{vs}

Temperature range

See pressure/temperature diagram

Mounting

See page 2

Flanges

EN 1092-2 PN 16

| Specifications | | | | | |
|----------------|-------------------------------|---------------|----------------------------|----------------------|--------------|
| Type | Flange connection DN in mm | Opening mm | k_{vs} -value m^3/h | Lifting height mm | Weight kg |
| 25 M1FB | 25 | 25 | 7.5 | 7 | 6 |
| 32 M1FB | 32 | 32 | 12.5 | 8 | 9 |
| 40 M1FB | 40 | 40 | 20 | 9 | 13 |
| 50 M1FB | 50 | 50 | 30 | 10 | 16 |
| 65 M1FB | 65 | 65 | 50 | 13 | 23 |
| 80 M1FB | 80 | 80 | 80 | 16 | 38 |

Subject to changes without notice.

Balanced 2-way Control Valves type M1FB

Cast iron, PN 16, DN 25 – 80 mm

2.3.03-I

GB-2

Definition of k_{VS} -value

The k_{VS} -value is identical to the IEC flow coefficient k_V and defined as the water flow rate in m^3/h through the fully open valve by a constant differential pressure, Δp_V of 1 bar.

Mounting

Up to 170°C the valve can be installed vertically as well as horizontally. For media temperature above 170°C, a cooling unit of type KS has to be applied. It must then be installed with actuator/thermostats downwards, and according to the following instructions:


| Valve Temperature | Cooling Unit | Suitable for |
|-------------------|--------------|---------------|
| 170°C - 250°C | KS-4 | All actuators |
| 250°C - 300°C | KS-5 | Thermostats |
| 250°C - 300°C | KS-6 | Valve Motors |

Strainer

It is recommended to use a strainer in front of the control valve if the liquid contains suspended particles.


Accessories

Manual Adjusting Device




The device has a built-in stuffing box. For tightening and manual operation of valves when an actuator has not been fitted, e.g. during periods of construction.

Cooling Unit KS-4




Cooling Unit protecting the stuffing box of the motor/thermostat. To be applied at valve temperatures between 170°C and 250°C.

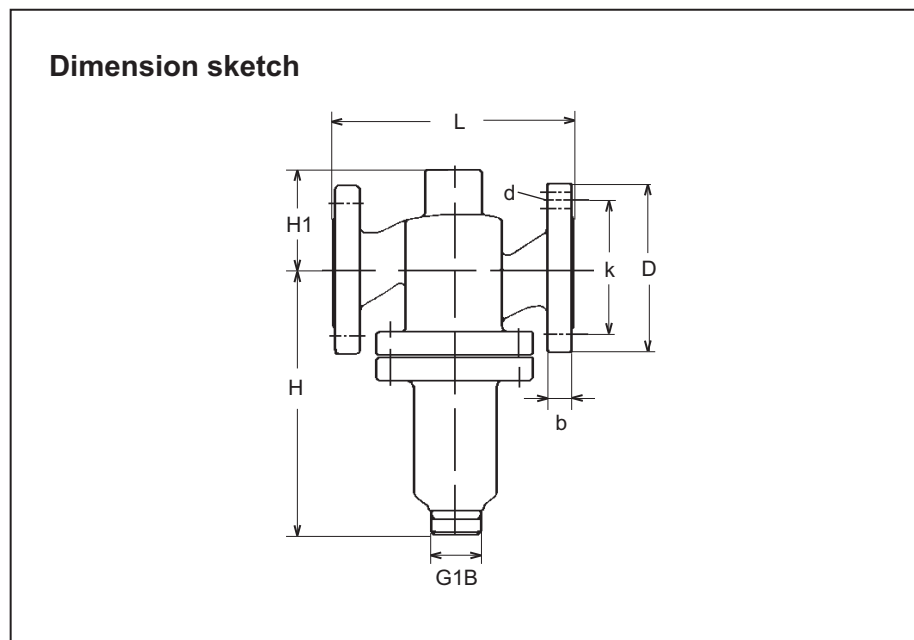


| Dimensions | | | | | | | |
|------------|------|------|-------|------|-------------|-------------|--------------------|
| Type | L mm | H mm | H1 mm | b mm | D (dia.) mm | k (dia.) mm | d mm dia. (number) |
| 25 M1FB | 160 | 180 | 70 | 16 | 115 | 85 | 14x(4) |
| 32 M1FB | 180 | 195 | 75 | 18 | 140 | 100 | 19x(4) |
| 40 M1FB | 200 | 205 | 85 | 19 | 150 | 110 | 19x(4) |
| 50 M1FB | 230 | 225 | 95 | 19 | 165 | 125 | 19x(4) |
| 65 M1FB | 290 | 260 | 110 | 19 | 185 | 145 | 19x(4) |
| 80 M1FB | 310 | 275 | 128 | 19 | 200 | 160 | 19x(8) |

Cooling Unit KS-5



Cooling units with built-in bellows glands, replacing stuffing box of thermostat (KS-5) or valve motor (KS-6). Must be applied at valve temperatures above 250°C.

Cooling Unit KS-6



Subject to changes without notice.